BELKIN®

OmniView® Dual User CAT5 KVM Switch

Belkin's OmniView CAT5 KVM switching solutions are designed to meet the needs of IT professionals in small to medium business environments. Leveraging CAT5 cabling technology, this product suite reduces cable clutter, provides reliable connectivity, and allows administrators to manage multi-platform servers at distances up to 100' away from the switch. Backed by Belkin's tradition of innovation and quality, OmniView CAT5 KVM switches offer a comprehensive feature set and best-in-class value.

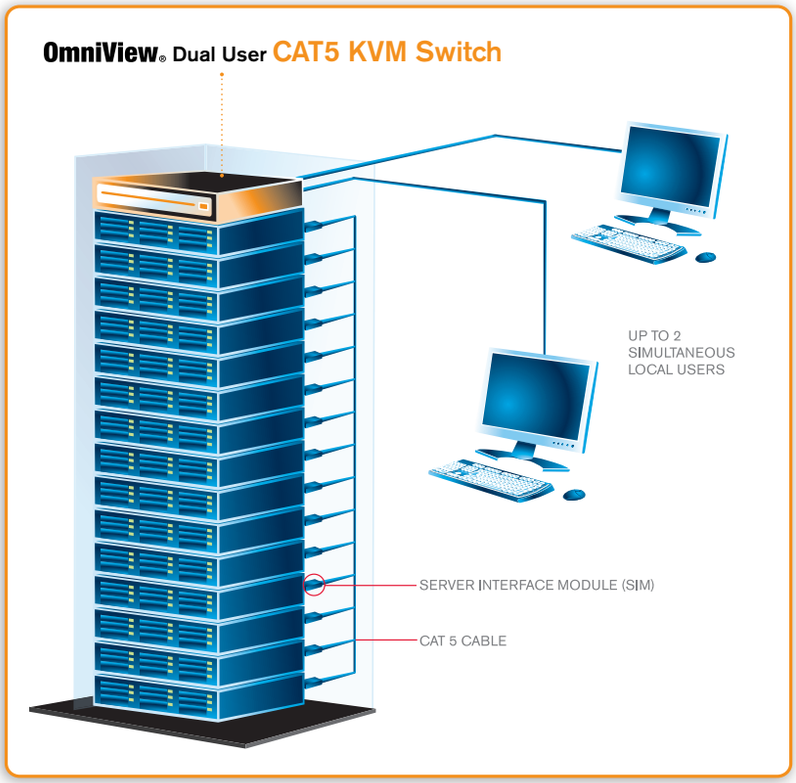

Dual User CAT5 KVM Features:

Multi-User Access
Up to 2 simultaneous local users

Advanced OSD
On-screen display (OSD) provides graphical interface for switching between systems, allowing user to assign specific names to designated ports

CAT5 Cabling Technology
Extend servers up to 100' from the KVM switch to accommodate any computing environment, while minimizing cable clutter with Cat5-based connectivity

Keep-Alive Intelligence
Server Interface Module (SIM) technology ensures consistent keyboard/mouse emulation

Multi-Platform Support
Support for USB, PS/2, and SUN platforms

Superior Video Performance
1600x1200 resolution capability ensures compatibility with high-performance server solutions

Field Upgradeable
Flash upgrade capability extends overall product life cycle and provides upgrade capabilities for future platform support

2-year Warranty
Belkin's assurance | Quality. Service. Value.

Package Contents

- 1 x OmniView CAT5 216/232 KVM Switch
- 1 x AC Power Cable
- 1 x User Manual CD
- 1 x Quick-Start Guide
- 1 x Rack-Mount Bracket and Screws

PART NUMBER	DESCRIPTION
F1DP216A	OmniView 2-User, 16-Port KVM Switch
F1DP232A	OmniView 2-User, 32-Port KVM Switch

SERVER INTERFACE MODULES (SIMS)

F1DP101A-AP	VGA, PS/2
F1DP101A-AU	VGA, USB (SUN USB Support)
F1DP101A-AP-8PK	VGA, PS/2 8-Pack
F1DP101A-AU-8PK	VGA, USB 8-Pack

RELATED PRODUCTS

F1DC101P-SR	17" LCD Rack Console – 1U – Single Rail
F1DC101P-DR	17" LCD Rack Console – 1U – Dual Rail
F1DC102P-SR	19" LCD Rack Console – 1U – Single Rail

Product Specifications

	OmniView CAT5 216	OmniView CAT5 232
Part Number	**F1DP216A**	**F1DP232A**
Number of Ports	16	32
Number of Users Supported	2 local	2 local
Maximum Resolution	1600x1200@85Hz	1600x1200@85Hz
Console Connection	USB, VGA	USB, VGA
Expansion	Cascading	Cascading
Server Connections	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems	Cat5-based connectivity; Server Interface Module (SIM) for PS/2 and USB systems
Dimensions	17" W x 1.7" H x 10.6" D (431 x 44 x 270 mm)	17" W x 1.7" H x 10.6" D (431 x 44 x 270 mm)
Weight	5.165 lbs (2.343 kg)	5.165 lbs (2.343 kg)
Power/Environment		
Power Supply	100 - 240 VAC 50 / 60 Hz	100 - 240 VAC 50 / 60 Hz
Operating Temperature	32° to 104° F (0° to 40° C)	32° to 104° F (0° to 40° C)
Storage Temperature	-40° to 158° F (-40° to 70° C)	-40° to 158° F (-40° to 70° C)
Humidity	80% non-condensing relative humidity	80% non-condensing relative humidity
Warranty	2 years	2 years

Note: Specifications are subject to change without notice.

BELKIN®

www.belkin.com/kvm

Belkin International, Inc.
Los Angeles, CA 90220, USA
310.898.1100

Belkin Ltd.
Rushden, United Kingdom
+44 (0) 1933 35 2000

Belkin Ltd.
Tuggerah, Australia
+61 (0) 2 4350 4600

© 2008 Belkin International, Inc. All rights reserved. All trade names are registered trademarks of respective manufacturers listed.